

RADIATION PATTERN ENVELOPE

Antenna Type Number: SHPX2-23
2.00 Foot Antenna 21.200-23.600 GHz Dual Polarized
Gain: 40.50 dBi at 22.400 GHz
— Envelope for a Horizontally Polarized Antenna (HH, HV)
— Envelope for a Vertically Polarized Antenna (VV, VH)


For further information, ask for Andrew Bulletin 1032, "Radiation Pattern Envelopes".



RPE 7258B

Engineering Approved:
14 August 2013

ANDREW CORPORATION

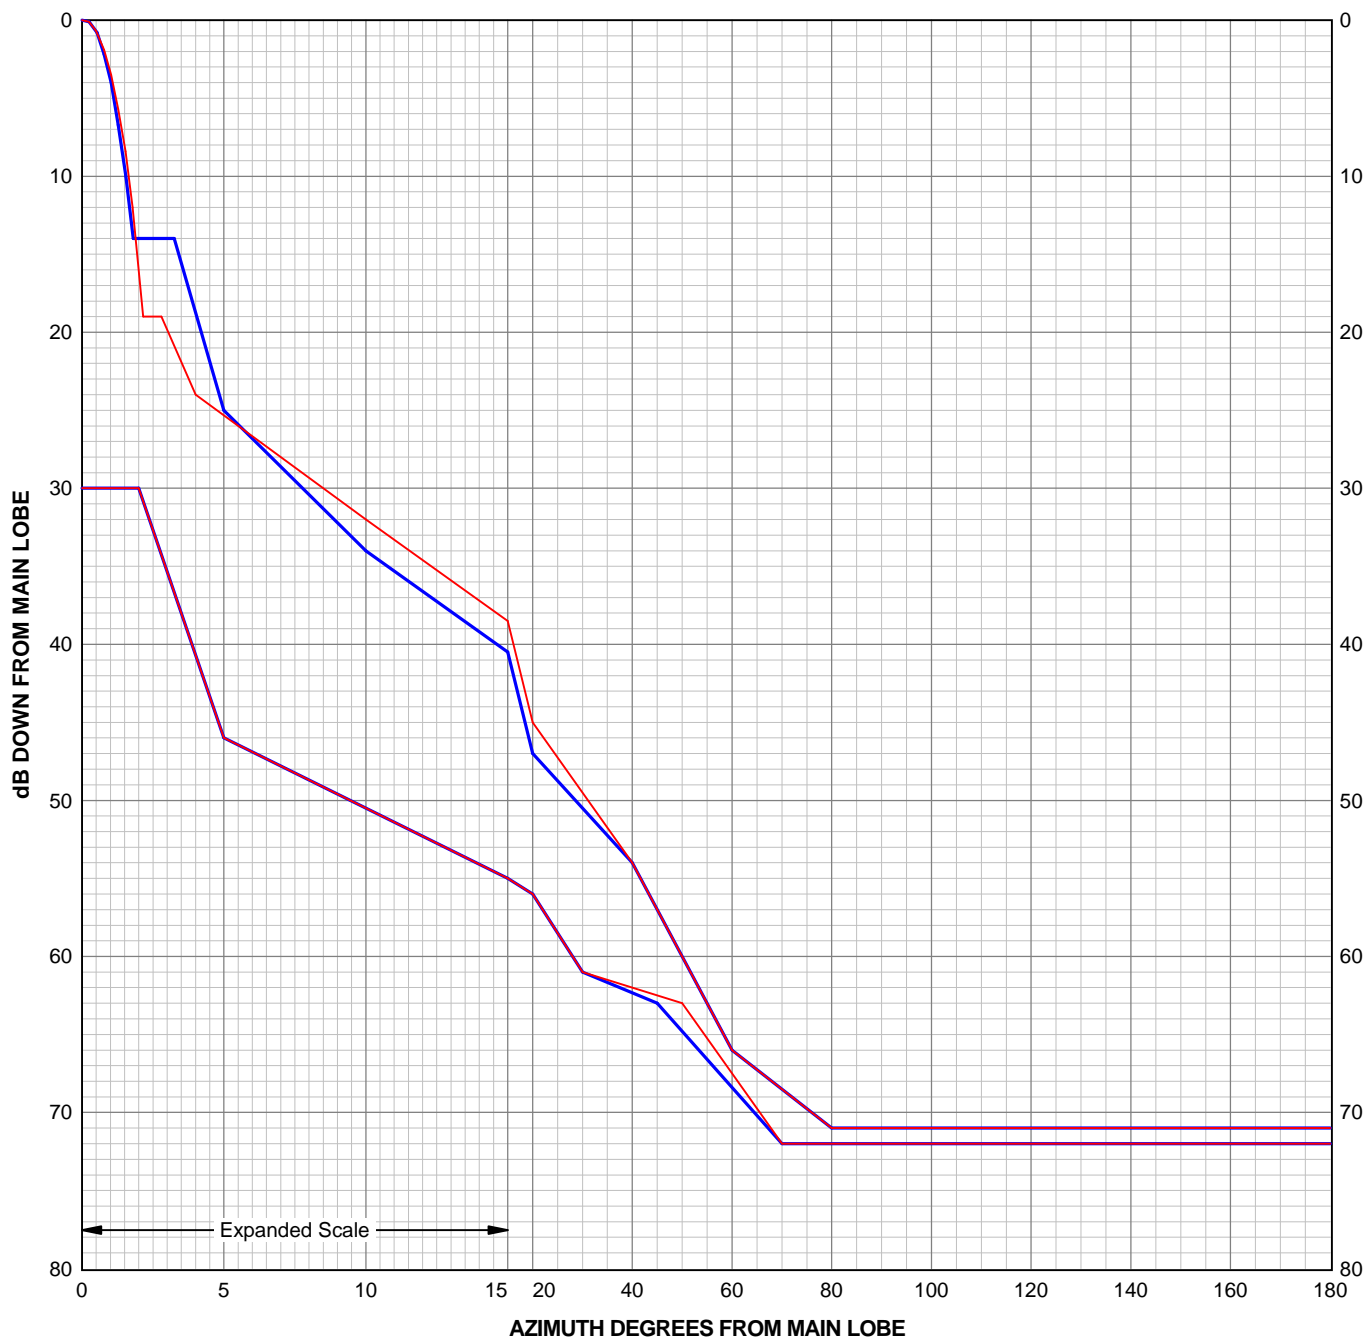

Antenna Type Number: SHPX2-23
 2.00 Foot Antenna 21.200-23.600 GHz Dual Polarized
 Gain: 40.50 dBi at 22.400 GHz
 RPE: 7258B
 Engineering Approved: 14 August 2013



Angle	H/H dB	Angle	H/V dB	Angle	V/V dB	Angle	V/H dB
0.00	0.00	0.00	-30.00	0.00	0.00	0.00	-30.00
0.25	-0.10	2.00	-30.00	0.25	-0.10	2.00	-30.00
0.53	-0.80	5.00	-46.00	0.50	-0.70	5.00	-46.00
0.78	-2.20	15.00	-55.00	0.78	-1.90	15.00	-55.00
1.03	-4.00	20.00	-56.00	1.03	-3.50	20.00	-56.00
1.28	-6.70	30.00	-61.00	1.28	-5.70	30.00	-61.00
1.55	-10.00	45.00	-63.00	1.53	-8.40	50.00	-63.00
1.80	-14.00	70.00	-72.00	1.78	-12.00	70.00	-72.00
3.25	-14.00	180.00	-72.00	2.15	-19.00	180.00	-72.00
5.00	-25.00			2.80	-19.00		
10.00	-34.00			4.00	-24.00		
20.00	-47.00			10.00	-32.00		
40.00	-54.00			20.00	-45.00		
60.00	-66.00			40.00	-54.00		
80.00	-71.00			60.00	-66.00		
180.00	-71.00			80.00	-71.00		
				180.00	-71.00		

The RPE is defined by connecting these points with straight lines.

PARALLEL POLARIZATION

HH - Horizontal port response to a horizontal signal

VV - Vertical port response to a vertical signal

CROSS POLARIZATION

HV - Horizontal port response to a vertical signal

VH - Vertical port response to a horizontal signal

ANDREW CORPORATION
 10500 W. 153rd Street
 Orland Park, IL. U.S.A 60462

Corporate Web Site: <http://www.andrew.com>
 Customer Service Center: 1-800-255-1479