

F1-XMHF-3-D



D-CLASS FSJ1-50A SureFlex® Jumper with interface types Nex10 Male and 4.3-10 Female, 3 ft

Logo Image



Product Classification

Product Series	FSJ1-50A
Product Type	Wireless transmission cable assembly

General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Interface, Connector A	Nex10 Male
Interface, Connector B	4.3-10 Female
Length	0.914 m 3.000 ft
Nominal Size	1/4 in
Specification Sheet Revision Level	A

Electrical Specifications

3rd Order IMD Dynamic	-162.00 dBc -119.00 dBm
3rd Order IMD Dynamic Test Method	Two +43 dBm carriers per IEC 62037

Environmental Specifications

F1-XMHF-3-D

Immersion Test Method

Meets IEC 60529:2001, IP68 in mated condition

Jumper Assembly Sample Label



Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
698–960 MHz	1.07	30.00
1700–2200 MHz	1.08	28.00
2200–2700 MHz	1.11	26.00
3400–3800 MHz	1.22	20.00
4000–6000 MHz	1.22	20.00

Regulatory Compliance/Certifications

Agency

RoHS 2011/65/EU

ISO 9001:2015

China RoHS SJ/T 11364-2014

Classification

Compliant by Exemption

Designed, manufactured and/or distributed under this quality management system


Above Maximum Concentration Value (MCV)



Included Products

FSJ1-50A — FSJ1-50A, HELIAX® Superflexible Low Density Foam Coaxial Cable, corrugated copper, 1/4 in, black PE jacket

FSJ1-50A

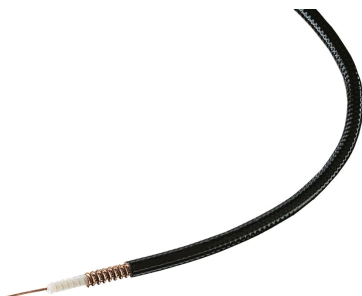

FSJ1-50A, HELIAX® Superflexible Low Density Foam Coaxial Cable, corrugated copper, 1/4 in, black PE jacket

Product Classification

Brand	HELIAX® SureFlex®
Product Series	FSJ1-50A
Product Type	Coaxial wireless cable

Construction Materials

Jacket Material	PE
Outer Conductor Material	Corrugated copper
Dielectric Material	Foam PE
Flexibility	Superflexible
Inner Conductor Material	Copper-clad aluminum wire
Jacket Color	Black

Dimensions

Nominal Size	1/4 in
Cable Length	0 km
Cable Weight	0.05 lb/ft 0.07 kg/m
Diameter Over Dielectric	4.826 mm 0.190 in
Diameter Over Jacket	7.366 mm 0.290 in
Inner Conductor OD	1.9050 mm 0.0750 in
Outer Conductor OD	6.350 mm 0.250 in

Electrical Specifications

Cable Impedance	50 ohm \pm 1 ohm
Capacitance	24.2 pF/ft 79.4 pF/m
dc Resistance, Inner Conductor	3.000 ohms/kft 9.843 ohms/km
dc Resistance, Outer Conductor	2.200 ohms/kft 7.216 ohms/km
dc Test Voltage	1600 V
Inductance	0.200 μ H/m 0.061 μ H/ft
Insulation Resistance	100000 Mohms•km
Jacket Spark Test Voltage (rms)	5000 V

FSJ1-50A

Operating Frequency Band	1 – 18000 MHz
Peak Power	6.4 kW
Velocity	82 %

Environmental Specifications

Installation Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Temperature	-55 °C to +85 °C (-67 °F to +185 °F)
Storage Temperature	-70 °C to +85 °C (-94 °F to +185 °F)

Mechanical Specifications

Bending Moment	0.7 N-m 0.5 ft lb
Flat Plate Crush Strength	100.0 lb/in 1.8 kg/mm
Minimum Bend Radius, Multiple Bends	25.40 mm 1.00 in
Minimum Bend Radius, Single Bend	25.40 mm 1.00 in
Number of Bends, minimum	15
Number of Bends, typical	20
Tensile Strength	68 kg 150 lb

Note

Performance Note	Values typical, unless otherwise stated
-------------------------	---

Standard Conditions

Attenuation, Ambient Temperature	20 °C 68 °F
Average Power, Ambient Temperature	40 °C 104 °F
Average Power, Inner Conductor Temperature	100 °C 212 °F

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
680–960 MHz	1.2	20.80
1700–2200 MHz	1.2	20.80
2200–2700 MHz	1.43	15.00

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)	Average Power (kW)
0.5	0.407	0.124	6.40
1	0.577	0.176	6.40
1.5	0.707	0.215	6.40
2	0.816	0.249	6.40
10	1.833	0.559	3.99
20	2.6	0.792	2.81
30	3.192	0.973	2.29
50	4.136	1.261	1.77
85	5.419	1.652	1.35
88	5.516	1.681	1.33
100	5.889	1.795	1.24
108	6.125	1.867	1.19
150	7.25	2.21	1.01
174	7.825	2.385	0.93
200	8.408	2.563	0.87
204	8.495	2.589	0.86
300	10.373	3.162	0.71
400	12.051	3.673	0.61
450	12.817	3.906	0.57
460	12.965	3.952	0.56
460	12.965	3.952	0.56
500	13.545	4.128	0.54
512	13.715	4.18	0.53
600	14.909	4.544	0.49
700	16.175	4.93	0.45
800	17.362	5.292	0.42
824	17.637	5.376	0.41
894	18.42	5.614	0.40
960	19.134	5.832	0.38
1000	19.556	5.96	0.37
1218	21.738	6.626	0.34
1250	22.044	6.719	0.33
1500	24.326	7.414	0.30
1700	26.038	7.936	0.28
1794	26.813	8.172	0.27
1800	26.862	8.187	0.27
2000	28.455	8.673	0.26
2100	29.227	8.908	0.25
2200	29.984	9.139	0.24
2300	30.727	9.365	0.24
2500	32.174	9.806	0.23
2700	33.576	10.233	0.22
3000	35.602	10.851	0.21
3400	38.183	11.638	0.19
3600	39.428	12.017	0.19

FSJ1-50A

3700	40.041	12.204	0.18
3800	40.647	12.389	0.18
3900	41.247	12.571	0.18
4000	41.841	12.753	0.17
4100	42.429	12.932	0.17
4200	43.012	13.11	0.17
4300	43.59	13.286	0.17
4400	44.163	13.46	0.17
4500	44.73	13.633	0.16
4600	45.293	13.805	0.16
4700	45.852	13.975	0.16
4800	46.405	14.144	0.16
4900	46.955	14.311	0.16
5000	47.5	14.477	0.15
6000	52.747	16.077	0.14
8000	62.37	19.01	0.12
8800	65.974	20.108	0.11
10000	71.173	21.693	0.10
12000	79.393	24.198	0.09
14000	87.172	26.569	0.08
15800	93.872	28.611	0.08
16000	94.601	28.833	0.08
18000	101.745	31.01	0.07

* Values typical, guaranteed within 5%

Regulatory Compliance/Certifications

Agency

UL/ETL Certification

RoHS 2011/65/EU

ISO 9001:2015

China RoHS SJ/T 11364-2014

Classification

Compliant

Compliant

Designed, manufactured and/or distributed under this quality management system

Above Maximum Concentration Value (MCV)

