

Fiber Indoor/Outdoor cable, TeraSPEED® Plenum Distribution, 36 fiber multi-unit with 12 fiber subunits, Gel-free, Singlemode + Multimode OM4, Feet jacket marking, Black jacket color

Product Classification

Regional Availability

Asia | Australia/New Zealand | Latin America | Middle East /Africa | North America

Portfolio

CommScope®

Product Type

Fiber indoor/outdoor cable

Product Series

P-OD

General Specifications

Cable Type

Distribution

Construction Type

Non-armored

Subunit Type

Gel-free

Jacket Color

Black

Jacket Marking

Feet

Subunit, quantity

3

Fibers per Subunit, quantity

12

Composite Fiber Count

12 + 24

Total Fiber Count

36

Dimensions


Buffer Tube/Subunit Diameter

6.9 mm | 0.272 in

Diameter Over Jacket

17.1 mm | 0.673 in

Representative Image

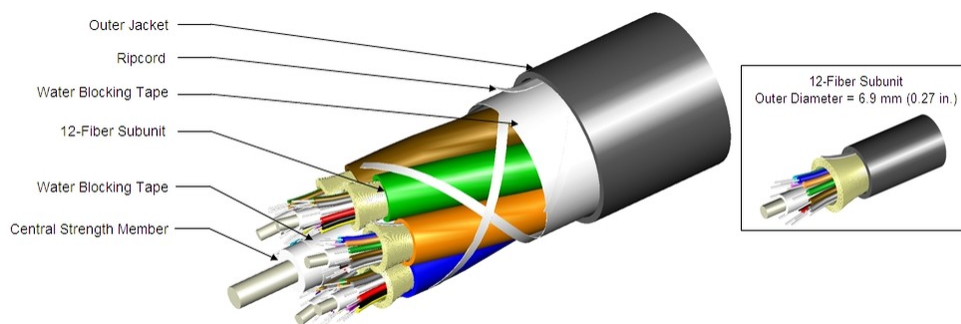

Mechanical Specifications

Minimum Bend Radius, loaded	257 mm 10.118 in
Minimum Bend Radius, unloaded	171 mm 6.732 in
Tensile Load, long term, maximum	1068 N 240.096 lbf
Tensile Load, short term, maximum	3560 N 800.32 lbf
Compression	22 N/mm 125.623 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	5.88 N-m 52.042 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	421 m 1,381.234 ft

Optical Specifications

Fiber Type	Composite MM/SM G.652.D and G.657.A1, TeraSPEED® OM4, LazrSPEED® 550
-------------------	--

Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-25 °C to +70 °C (-13 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Cable Qualification Standards	ANSI/ICEA S-104-696 Telcordia GR-20 (water penetration) Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130 NFPA 262
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze Test Method	IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	259 kg/km 174.04 lb/kft
---------------------	---------------------------

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

- CS-5K-TB – LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber
- CS-8W-TB – TeraSPEED® Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable