



Fiber indoor/outdoor cable, LazrSPEED®, Single Jacket All-Dielectric, Low Smoke Zero Halogen (LSZH), Gel-Free, 6 fiber, Stranded Loose Tube, Multimode OM3, Feet jacket marking, Black jacket color, B2ca flame rating. Provides Rodent Resistance

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber indoor/outdoor cable  |
| <b>Product Series</b>        | C-LN  |


## General Specifications

|                                     |                     |
|-------------------------------------|---------------------|
| <b>Cable Type</b>                   | Stranded loose tube |
| <b>Construction Type</b>            | Non-armored         |
| <b>Subunit Type</b>                 | Gel-free            |
| <b>Filler, quantity</b>             | 4                   |
| <b>Jacket Color</b>                 | Black               |
| <b>Jacket Marking</b>               | Feet                |
| <b>Subunit, quantity</b>            | 1                   |
| <b>Fibers per Subunit, quantity</b> | 6                   |
| <b>Total Fiber Count</b>            | 6                   |

## Dimensions

|                                     |                     |
|-------------------------------------|---------------------|
| <b>Buffer Tube/Subunit Diameter</b> | 2.5 mm   0.098 in   |
| <b>Diameter Over Jacket</b>         | 13.61 mm   0.536 in |

## Representative Image

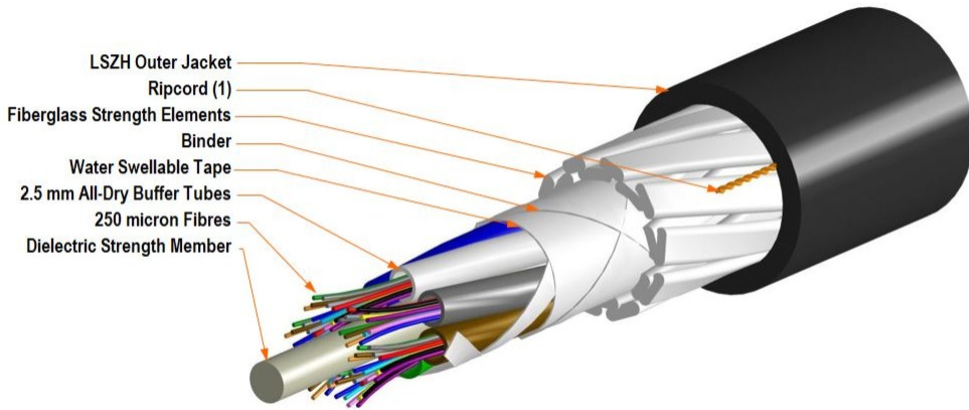

## Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 204 mm   8.031 in                     |
| <b>Minimum Bend Radius, unloaded</b>     | 136 mm   5.354 in                     |
| <b>Tensile Load, long term, maximum</b>  | 1334 N   299.895 lbf                  |
| <b>Tensile Load, short term, maximum</b> | 4448 N   999.95 lbf                   |
| <b>Compression</b>                       | 22 N/mm   125.623 lb/in               |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3              |
| <b>Flex</b>                              | 25 cycles                             |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6             |
| <b>Impact</b>                            | 4.41 N-m   39.032 in lb               |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4              |
| <b>Strain</b>                            | See long and short term tensile loads |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1              |
| <b>Twist</b>                             | 10 cycles                             |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7              |
| <b>Vertical Rise, maximum</b>            | 654 m   2,145.669 ft                  |

## Optical Specifications

|                   |   |
|-------------------|---|
| <b>Fiber Type</b> | OM3, LazrSPEED® 300   OM3, LazrSPEED® 300 |
|-------------------|---|

## Environmental Specifications

|                                 |                                      |
|---------------------------------|--------------------------------------|
| <b>Installation temperature</b> | -30 °C to +55 °C (-22 °F to +131 °F) |
| <b>Operating Temperature</b>    | -40 °C to +60 °C (-40 °F to +140 °F) |

# 760242813 | C-006-LN-5L-F06BK/25D/HTS/B2

|   |  |
|---|--|
| <b>Storage Temperature</b>                          | -40 °C to +65 °C (-40 °F to +149 °F)                                 |
| <b>Cable Qualification Standards</b>                | ANSI/ICEA S-104-696   EN 187105   Telcordia GR-20   Telcordia GR-409 |
| <b>EN50575 CPR Cable EuroClass Fire Performance</b> | B2ca   |
| <b>EN50575 CPR Cable EuroClass Smoke Rating</b>     | s1a  |
| <b>EN50575 CPR Cable EuroClass Droplets Rating</b>  | d0   |
| <b>EN50575 CPR Cable EuroClass Acidity Rating</b>   | a1   |
| <b>Environmental Space</b>                          | Aerial, lashed   Buried   Low Smoke Zero Halogen (LSZH)              |
| <b>Flame Test Method</b>                            | IEC 60332-1   IEC 60754-2   IEC 61034-2                              |
| <b>Jacket UV Resistance</b>                         | UV stabilized  |
| <b>Water Penetration</b>                            | 24 h   |
| <b>Water Penetration Test Method</b>                | FOTP-82   IEC 60794-1 F5   |

## Environmental Test Specifications

|                                      |                                      |
|--------------------------------------|--------------------------------------|
| <b>Cable Freeze</b>                  | -2 °C   28.4 °F                      |
| <b>Cable Freeze Test Method</b>      | FOTP-98   IEC 60794-1 F15            |
| <b>Heat Age</b>                      | -40 °C to +85 °C (-40 °F to +185 °F) |
| <b>Heat Age Test Method</b>          | IEC 60794-1 F9                       |
| <b>Low High Bend</b>                 | -30 °C to +55 °C (-22 °F to +131 °F) |
| <b>Low High Bend Test Method</b>     | FOTP-37   IEC 60794-1 E11            |
| <b>Temperature Cycle</b>             | -40 °C to +60 °C (-40 °F to +140 °F) |
| <b>Temperature Cycle Test Method</b> | FOTP-3   IEC 60794-1 F1              |

## Packaging and Weights

|                     |                            |
|---------------------|----------------------------|
| <b>Cable weight</b> | 194 kg/km   130.362 lb/kft |
|---------------------|----------------------------|

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CENELEC       | EN 50575 compliant, Declaration of Performance (DoP) available                 |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |



## Included Products

|          |   |
|----------|---|
| CS-5L-LT | – LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber |
|----------|---|

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable