


JAH4-65B-R4

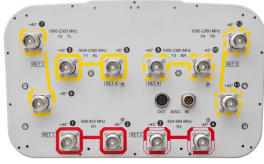

12-port sector antenna, 2x 698-803, 2x 824-894 and 8x 1695-2360 MHz, 65° HPBW, 4x RETs and low bands have diplexers.

- Internal filter on low band and interleaved dipole technology providing for attractive, low wind load mechanical package
- One RET for 700MHz, one RET for 850MHz, and one RET for each side-by-side pair of high bands to ensure same tilt level for 4x Rx or 4x MIMO

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector body grounded to reflector and mounting bracket
Performance Note	Outdoor usage Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
Radome Material	Fiberglass, UV resistant
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10-30 Vdc
Internal RET	High band (2) Low band (2)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W


JAH4-65B-R4

Power Consumption, normal conditions, maximum 8 W
Protocol 3GPP/AISG 2.0 (Multi-RET)

Dimensions

Width 350 mm | 13.78 in
Depth 208 mm | 8.189 in
Length 1828 mm | 71.969 in
Net Weight, antenna only 32.7 kg | 72.091 lb

Array Layout

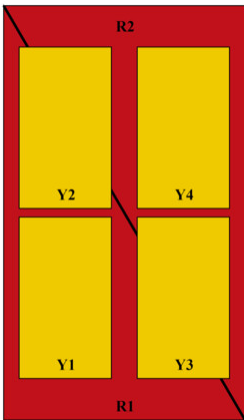


Array ID	Frequency (MHz)	RF Connector	HPBW	RET (MRET)	AISG No.	AISG RET UID
R1	698-803	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxMM.1
R2	824-894	3 - 4	65°	2	AISG1	CPxxxxxxxxxxxxMM.2
Y2	1695-2360	7 - 8	65°	3	AISG1	CPxxxxxxxxxxxxMM.3
Y4	1695-2360	11 - 12	65°			
Y1	1695-2360	5 - 6	65°	4	AISG1	CPxxxxxxxxxxxxMM.4
Y3	1695-2360	9 - 10	65°			

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

JAH4-65B-R4

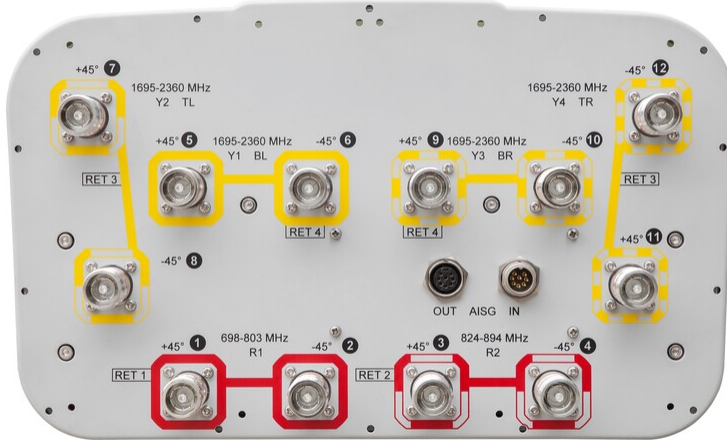

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2360 MHz 698 – 803 MHz 824 – 894 MHz
Polarization	±45°
Total Input Power, maximum	900 W

Electrical Specifications

	R1	R2	Y1-Y2	Y1-Y2	Y1-Y2	Y1-Y2
Frequency Band, MHz	698–803	824–894	1695–1880	1850–1990	1920–2180	2300–2360
RF Port	1-2	3-4	5-12	5-12	5-12	5-12
Gain, dBi	14.9	15.4	15.8	16.1	16.3	16.8
Beamwidth, Horizontal, degrees	68	66	63	61	63	68
Beamwidth, Vertical, degrees	11.8	10.4	11	10.3	9.7	8.9
Beam Tilt, degrees	2–14	2–14	2–14	2–14	2–14	2–14
USLS (First Lobe), dB	20	19	18	18	19	19
Front-to-Back Ratio at 180°, dB	32	34	35	39	35	38
Isolation, Cross Polarization, dB	25	25	25	25	25	25

JAH4-65B-R4

Isolation, Inter-band, dB	30	30	30	30	30	30
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	300	300	250	250	250	200

Mechanical Specifications

BASTA Version, mechanical	BASTA v11
Wind Loading @ Velocity, frontal	301.0 N @ 150 km/h (67.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	254.0 N @ 150 km/h (57.1 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	638.0 N @ 150 km/h (143.4 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	319.0 N @ 150 km/h (71.7 lbf @ 150 km/h)
Wind Speed, maximum	241.4 km/h (150 mph)

Packaging and Weights

Width, packed	456 mm 17.953 in
Depth, packed	357 mm 14.055 in
Length, packed	1975 mm 77.756 in
Weight, gross	42.1 kg 92.815 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-2F	–	Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.
-----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---