# 760248635 | OFDC-B8G-L2/88-18-N-72



OFDC B8G Fiber Optic Splice/Patch Closure, Gel Cable sealing, 6 preinstalled 12 fiber trays , 8 duplex LC/APC adapters, 1-8 splitter pre-conn at drop side

- Advanced gel sealing technology ensures fast and easy field handling without a need for special tools
- Individual access to drop cable connection area and seperate zones for looped cable storage for most cable types
- Compact and modular design suited for wraparound drop cable installation, enabling faster deployments
- Allows easy pass-through cabling and integration of optical components, even at later deployment stages

### Product Classification

Regional Availability	EMEA
Product Type	Single-ended, rectangular fiber closure
Product Series	OFDC

#### **General Specifications**

Length

Cable Ports Quantity, total	4 round ports + 8 multi-out ports (16 cables)
Cable Sealing Type	Compressed gel
Closure Sealing Type	Hinged with latch
Closure Style	Single-ended
Color	Black
Mounting	Manhole   Pedestal   Strand   Wall
Port Type	LC/APC
Splice Tray Included, quantity	6
Splice Tray Type Included	12-way, heat shrink
Splitter Type	1 x 8
Splitter, quantity	1
Dimensions	
Height	128 mm   5.039 in
Width	156 mm   6.142 in

Page 1 of 3


©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 2, 2024

324 mm | 12.756 in



## 760248635 | OFDC-B8G-L2/88-18-N-72

## Ordering Tree

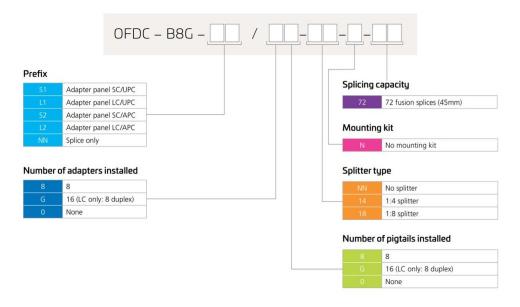

### Material Specifications

Material Type

Rugged polymer

### **Environmental Specifications**

Installation temperature	-5 °C to +45 °C (+23 °F to +113 °F)
Storage Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Relative Humidity	93%, non-condensing
Environmental Space	Above ground   Below ground
Qualification Standards	IEC 60529, IP68 + 2 m waterhead
UV Resistance	UV stabilized

#### Packaging and Weights

Packaging quantity	1	
Packaging Type	Box	Carton

#### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 2, 2024



## 760248635 | OFDC-B8G-L2/88-18-N-72

REACH-SVHC

ROHS UK-ROHS Compliant as per SVHC revision on www.commscope.com/ProductCompliance

Compliant

Compliant



Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 2, 2024

