Base Product



Fiber Optic Cable, Indoor Riser, Distribution Cable, Aluminum Interlocking Armor

- CommScope's indoor fiber cables are positioned for Data Center or Central Office applications
- Superior mechanical and optical performance with unmatched stability and quality
- Available Jacket Colors: Aqua, Black, Green, Orange, White and Yellow

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	R-DZ
General Specifications	
Cable Type	Distribution
Construction Type	Armored
Subunit Type	Gel-free

Ordering Tree

Page 1 of 2

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 22, 2024



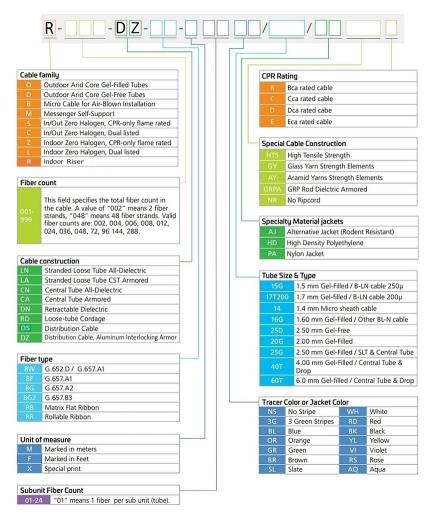

Environmental Specifications

Installation temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
Environmental Space	Riser

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

Page 2 of 2

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 22, 2024

