DFJ-2S109NE



HELIAX® Direct tail, 2 single mode fiber, EHCS direct-connect JUMPER FOR USE WITH EHCS TRUNK, AOPE SHROUD AND LC DUPLEX for Nokia radio.

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America		
Product Type	Wireless Fiber Cable Assemblies		
Product Brand	HELIAX®		
Product Series	DFJ		
Ordering Note	ANDREW® non-standard product		
General Specifications			
Construction Type	Discrete fiber tail		
Interface, Connector A	DLC		
Interface Body Style, connector A	Straight		
Interface, Connector B	ODC-LC		
Interface Feature, connector B	Outdoor		
Interface Body Style, connector B	Straight		
Jacket Color	Black		
Total Fibers, quantity	2		
Dimensions			
Cable Assembly Length Range (m)	1 – 30		
Diameter Over Jacket	6 mm 0.236 in		


Ordering Tree

Page 1 of 3

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 4, 2025



DFJ-2S109NE

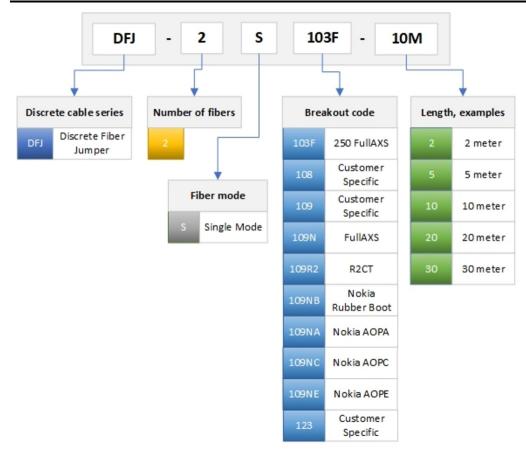

Mechanical Specifications

Minimum Bend Radius, furcation	61 mm 2.402 in
Optical Specifications	
Fiber Mode	Singlemode
Fiber Type	G.657.A2
Insertion Loss, typical note	Insertion loss is measured at 1310 and 1550 nm
Insertion Loss, typical	0.75

Environmental Specifications

Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Outdoor
Packaging and Weights	
Cable weight	48 kg/km 32.255 lb/kft

Page 2 of 3

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 4, 2025

COMMSCOPE°

* Footnotes

Insertion Loss, typical note Insertion loss is measured at a room temp of +20°C (+68°F)

Page 3 of 3

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 4, 2025

