


# U3VQPQXTM

## Base Product



Ultra Low Loss (ULL) OM5 MPO8 (Non-Pinned) to MPO8 (Pinned), Fiber Trunk Cable Assembly, 144-Fiber, LZSH B2ca

## Product Classification

|                              |  |
|------------------------------|--|
| <b>Regional Availability</b> | Europe   |
| <b>Portfolio</b>             | CommScope®   |
| <b>Product Type</b>          | Fiber trunk cable assembly   |
| <b>Product Brand</b>         | Propel   SYSTIMAX ULL  |
| <b>Ordering Note</b>         | For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration |

## General Specifications

|                                     |                         |
|-------------------------------------|-------------------------|
| <b>Connector A, quantity</b>        | 18                      |
| <b>Color, boot A</b>                | Gray                    |
| <b>Color, connector A</b>           | Lime green              |
| <b>Connector B, quantity</b>        | 18                      |
| <b>Color, boot B</b>                | Gray                    |
| <b>Color, connector B</b>           | Lime green              |
| <b>Construction Type</b>            | Stranded                |
| <b>Furcation Color</b>              | Lime green              |
| <b>Interface, Connector A</b>       | MPO-08/UPC Female       |
| <b>Interface, Connector B</b>       | MPO-08/UPC Male         |
| <b>Jacket Color</b>                 | Lime green              |
| <b>Polarity</b>                     | Method B Enhanced (ULL) |
| <b>Fibers per Subunit, quantity</b> | 8                       |
| <b>Total Fibers, quantity</b>       | 144                     |


## Dimensions

|                        |       |
|------------------------|-------|
| <b>Breakout Length</b> | 22 in |
|------------------------|-------|

# U3VQPQXTM

|   |          |
|---|----------|
| <b>Cable Assembly Length Range (m)</b>  | 3 – 305  |
| <b>Cable Assembly Length Range (ft)</b> | 10 – 999 |

## Ordering Tree

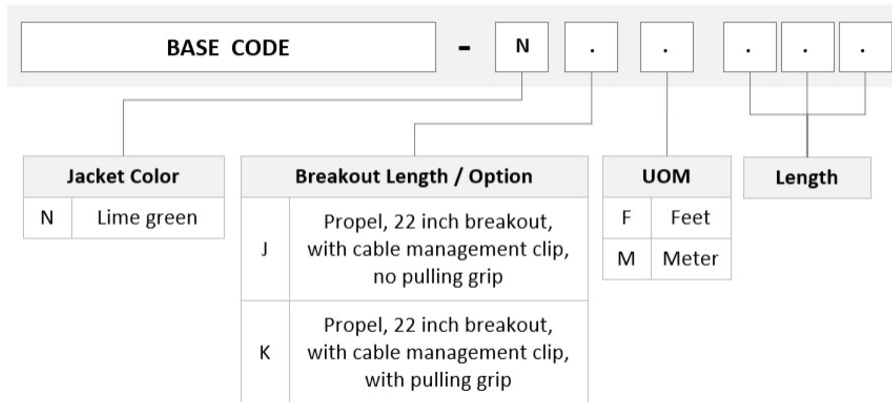

## Mechanical Specifications

|  |                               |
|--|-------------------------------|
| <b>Cable Retention Strength, maximum</b> | 11.24 lb @ 0°   4.40 lb @ 90° |
|--|-------------------------------|

## Optical Specifications

|                   |                 |
|-------------------|-----------------|
| <b>Fiber Mode</b> | Multimode       |
| <b>Fiber Type</b> | OM5, LazrSPEED® |

## Environmental Specifications

|   |  |
|---|--|
| <b>Operating Temperature</b>                        | -10 °C to +60 °C (+14 °F to +140 °F)   |
| <b>EN50575 CPR Cable EuroClass Fire Performance</b> | B2ca                                   |
| <b>Environmental Space</b>                          | Indoor   Low Smoke Zero Halogen (LSZH) |

## Regulatory Compliance/Certifications

| Agency        | Classification   |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

## Included Products

|                                       |  |
|---------------------------------------|--|
| 760253114<br>N-144-MP-5G-F08LM/20T/B2 | – Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 144 fiber with 2.0 mm Subunits, Multimode OM5, Gel-free, Meters jacket marking, Lime green jacket color, B2ca |
|---------------------------------------|--|

# U3VQPQXTM

---

|           | Flame rating   |
|-----------|--|
| 860659020 | - MPO-08, ULTRA LOW LOSS, MALE, OM5, LIME-GREEN, 2mm   |
| 860659026 | - MPO-08, ULTRA LOW LOSS, FEMALE, OM5, LIME-GREEN, 2mm |

# 760253114 | N-144-MP-5G-F08LM/20T/B2



Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 144 fiber with 2.0mm Subunits, Multimode OM5, Gel-free, Meters jacket marking, Lime green jacket color, B2ca Flame rating

## Product Classification

|                              |                                     |
|------------------------------|-------------------------------------|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA |
| <b>Portfolio</b>             | CommScope®                          |
| <b>Product Type</b>          | Fiber indoor cable                  |
| <b>Product Series</b>        | N-MP                                |

## General Specifications

|                                     |                 |
|-------------------------------------|-----------------|
| <b>Cable Type</b>                   | MPO trunk cable |
| <b>Construction Type</b>            | Non-armored     |
| <b>Subunit Type</b>                 | Gel-free        |
| <b>Filler, quantity</b>             | 0               |
| <b>Jacket Color</b>                 | Lime green      |
| <b>Jacket Marking</b>               | Feet            |
| <b>Subunit, quantity</b>            | 18              |
| <b>Fibers per Subunit, quantity</b> | 8               |
| <b>Total Fiber Count</b>            | 144             |

## Dimensions

|                                     |                  |
|-------------------------------------|------------------|
| <b>Buffer Tube/Subunit Diameter</b> | 2 mm   0.079 in  |
| <b>Diameter Over Jacket</b>         | 13 mm   0.512 in |

## Representative Image



## Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 195 mm   7.677 in                     |
| <b>Minimum Bend Radius, unloaded</b>     | 130 mm   5.118 in                     |
| <b>Tensile Load, long term, maximum</b>  | 200 N   44.962 lbf                    |
| <b>Tensile Load, short term, maximum</b> | 667 N   149.948 lbf                   |
| <b>Compression</b>                       | 10 N/mm   57.101 lb/in                |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3              |
| <b>Flex</b>                              | 25 cycles                             |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6             |
| <b>Impact</b>                            | 2.94 N-m   26.021 in lb               |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4              |
| <b>Strain</b>                            | See long and short term tensile loads |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1              |
| <b>Twist</b>                             | 10 cycles                             |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7              |
| <b>Vertical Rise, maximum</b>            | 131 m   429.79 ft                     |

## Optical Specifications

|                   |                          |
|-------------------|--------------------------|
| <b>Fiber Type</b> | OM5, LazrSPEED® wideband |
|-------------------|--------------------------|

## Environmental Specifications

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>Installation temperature</b> | 0 °C to +60 °C (+32 °F to +140 °F) |
| <b>Operating Temperature</b>    | 0 °C to +70 °C (+32 °F to +158 °F) |

# 760253114 | N-144-MP-5G-F08LM/20T/B2

---

|   |   |
|---|---|
| <b>Storage Temperature</b>                          | -40 °C to +70 °C (-40 °F to +158 °F)                                  |
| <b>Cable Qualification Standards</b>                | ANSI/ICEA S-83-596   Telcordia GR-409                                 |
| <b>EN50575 CPR Cable EuroClass Fire Performance</b> | B2ca  |
| <b>EN50575 CPR Cable EuroClass Smoke Rating</b>     | s1a   |
| <b>EN50575 CPR Cable EuroClass Droplets Rating</b>  | d1  |
| <b>EN50575 CPR Cable EuroClass Acidity Rating</b>   | a1  |
| <b>Environmental Space</b>                          | Dual Rated LSZH/Riser   Riser   |
| <b>Flame Test Listing</b>                           | NEC OFNR-ST1 (ETL) and c(ETL)   |
| <b>Flame Test Method</b>                            | CSA FT4   IEC 60332-3   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685 |

## Environmental Test Specifications

|                                      |                                    |
|--------------------------------------|------------------------------------|
| <b>Low High Bend</b>                 | 0 °C to +70 °C (+32 °F to +158 °F) |
| <b>Low High Bend Test Method</b>     | FOTP-37   IEC 60794-1 E11          |
| <b>Temperature Cycle</b>             | 0 °C to +70 °C (+32 °F to +158 °F) |
| <b>Temperature Cycle Test Method</b> | FOTP-3   IEC 60794-1 F1            |

## Packaging and Weights

|                     |                             |
|---------------------|-----------------------------|
| <b>Cable weight</b> | 155.9 kg/km   104.76 lb/kft |
|---------------------|-----------------------------|

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

# 860659020

---



MPO-08, ULTRA LOW LOSS, MALE, OM5, LIME-GREEN, 2mm

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber connector   |
| <b>Product Brand</b>         | LazrSPEED®  |

## General Specifications

|                          |              |
|--------------------------|--------------|
| <b>Color</b>             | Lime green   |
| <b>Color, boot</b>       | Black        |
| <b>Ferrule Geometry</b>  | Flat         |
| <b>Interface</b>         | MPO/UPC Male |
| <b>Interface Feature</b> | Pinned       |
| <b>Total Fiber Count</b> | 8            |

## Dimensions

|                                  |                 |
|----------------------------------|-----------------|
| <b>Compatible Cable Diameter</b> | 2 mm   0.079 in |
|----------------------------------|-----------------|

## Material Specifications

|                         |         |
|-------------------------|---------|
| <b>Ferrule Material</b> | Polymer |
|-------------------------|---------|

## Optical Specifications

|                                    |                  |
|------------------------------------|------------------|
| <b>Fiber Mode</b>                  | Multimode        |
| <b>Fiber Type</b>                  | OM5              |
| <b>Optical Components Standard</b> | ANSI/TIA-568-C.3 |
| <b>Insertion Loss, maximum</b>     | 0.2 dB           |
| <b>Return Loss, minimum</b>        | 27 dB            |

## Packaging and Weights

**Packaging quantity** 1

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |





# 860659026

---



MPO-08, ULTRA LOW LOSS, FEMALE, OM5, LIME-GREEN, 2mm

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber connector   |
| <b>Product Brand</b>         | LazrSPEED®  |

## General Specifications

|                          |                |
|--------------------------|----------------|
| <b>Color</b>             | Lime green     |
| <b>Color, boot</b>       | Black          |
| <b>Ferrule Geometry</b>  | Flat           |
| <b>Interface</b>         | MPO/UPC Female |
| <b>Interface Feature</b> | Unpinned       |
| <b>Total Fiber Count</b> | 8              |

## Dimensions

|                                  |                 |
|----------------------------------|-----------------|
| <b>Compatible Cable Diameter</b> | 2 mm   0.079 in |
|----------------------------------|-----------------|

## Material Specifications

|                         |         |
|-------------------------|---------|
| <b>Ferrule Material</b> | Polymer |
|-------------------------|---------|

## Optical Specifications

|                                    |                  |
|------------------------------------|------------------|
| <b>Fiber Mode</b>                  | Multimode        |
| <b>Fiber Type</b>                  | OM5              |
| <b>Optical Components Standard</b> | ANSI/TIA-568-C.3 |
| <b>Insertion Loss, maximum</b>     | 0.2 dB           |
| <b>Return Loss, minimum</b>        | 27 dB            |

## Packaging and Weights

**Packaging quantity** 1

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |

