

## Fiber Optic Outdoor 24 Fiber Multi-tube Cable with Corrugated Steel Armoring, OM3, with HDPE Jacket

- Designed for use in backbone cabling, campus site cabling, outdoor ducts or direct burial cabling applications
- Designed with a gel filled loose tube construction to ensure protection against moisture ingress

### Product Classification

<b>Regional Availability</b>	Asia   India
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber OSP cable
<b>Product Series</b>	O-LA


### General Specifications

<b>Armor Type</b>	Corrugated steel
<b>Cable Type</b>	Loose tube
<b>Subunit Type</b>	Gel-filled
<b>Filler, quantity</b>	2
<b>Jacket Color</b>	Black
<b>Jacket Marking</b>	Meters
<b>Strength Members</b>	Central fiber reinforced polymer (FRP) rod
<b>Fibers per Subunit, quantity</b>	24
<b>Total Fiber Count</b>	24

### Dimensions

<b>Cable Length</b>	2000 m   6,561.68 ft
<b>Diameter Over Jacket</b>	15.5 mm   0.61 in

### Representative Image

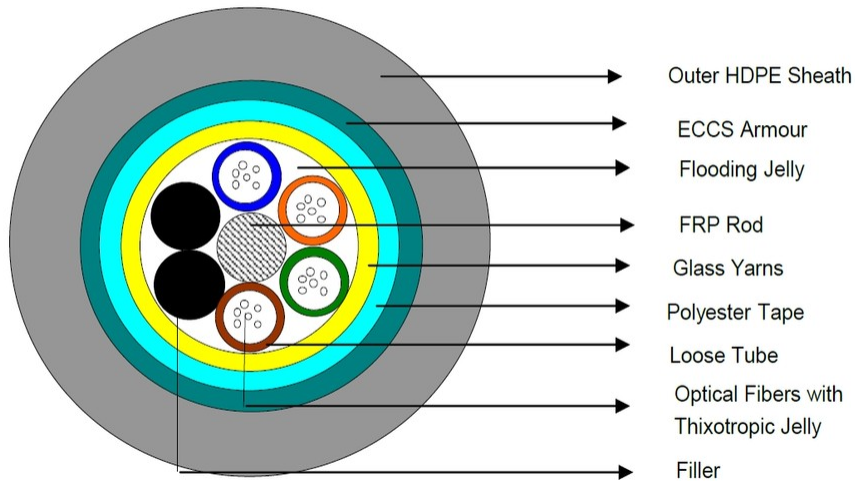

## Material Specifications

**Jacket Material** High density polyethylene (HDPE)

## Mechanical Specifications

**Minimum Bend Radius, loaded** 310 mm | 12.205 in  
**Minimum Bend Radius, unloaded** 248 mm | 9.764 in  
**Tensile Load, short term, maximum** 4000 N | 899.236 lbf  
**Cable Crush Resistance, maximum** 44 N/mm | 251.246 lb/in  
**Flex** 25 cycles

## Optical Specifications

**Fiber Type** OM3

## Optical Specifications, Wavelength Specific

**Attenuation, maximum** 1.00 dB/km @ 1,300 nm | 3.00 dB/km @ 850 nm  
**Standards Compliance** ANSI/TIA-568.C.3 | TIA-492AAAC (OM3)

## Environmental Specifications

**Operating Temperature** -20 °C to +70 °C (-4 °F to +158 °F)

## Packaging and Weights

**Cable weight** 215 kg/km | 144.473 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable