PPLARX8LCQX8

Propel ULL Multimode OM4 Cabled Module, 1x8 duplex LC Propel module on End A to 1x8f MPO /UPC pinned on End B, 8 fiber LSZH Patchcord, Method A

- This component requires 2 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method A polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note Modules with patch cord cable are single subunit, and have no additional outer jacket

General Specifications

Configuration Type PROPEL Module to MPO Connector

Cable Color Aqua

Cable TypePatch cord LSZH

Interface, front LC/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, front Aqua

Interface Feature, rear Key up/down | Pinned

Module Size, end A8 fiberModule Size, end B8 fiberModule Quantity, end A1

Module Quantity, end B

Polarity Method A

Total Fibers, quantity 8

Total Ports, quantity, front 4

Dimensions

COMMSCOPE®

PPLARX8LCQX8

 Height
 11 mm | 0.433 in


 Width
 65 mm | 2.559 in

Depth 170 mm | 6.693 in

Breakout Length, end B 12 in | 120 in | 33 in | 36 in | 48 in | 60 in | 72 in

Cable Assembly Length Range (m) 1-400 Cable Assembly Length Range (ft) 2-999

Ordering Tree

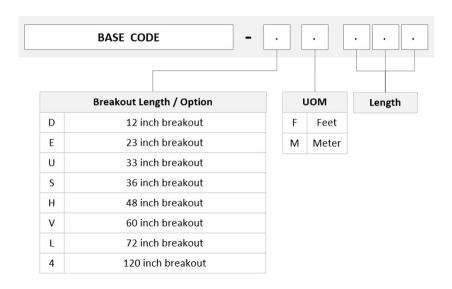

Optical Specifications

Fiber ModeMultimodeFiber TypeOM4Insertion Loss, maximum0.35 dB

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

COMMSCOPE®

PPLARX8LCQX8

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



Included Products

760251447 – LazrSPEED® Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 8

N-008-MP-5K-F20AQ/E fiber