PPLUGV8LCUCR



Propel ULL Multimode OM5 Cabled Module, 2x8 duplex LC Propel module on End A to Stub on End B, 16 fiber Plenum Trunk, Method B Enhanced

- This component requires 2 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel **Product Series** PPL

For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is **Ordering Note**

400 meters

General Specifications

Configuration Type PROPEL Module to Stub

Cable Color Lime green

Trunk Cable - Plenum Cable Type

Interface, front LC/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, front Lime green

Interface, rear Stub 8 fiber Module Size, end A Module Quantity, end A

Total Fibers, quantity 16 Total Ports, quantity, front

Dimensions

Polarity

Height 11 mm | 0.433 in

Page 1 of 3

8

Method B Enhanced (ULL)

PPLUGV8LCUCR

Width 98 mm | 3.858 in


Depth 170 mm | 6.693 in

Breakout Length, end B 0 in

Cable Assembly Length Range (m) 1 - 400

Cable Assembly Length Range (ft) 2 - 999

Ordering Tree

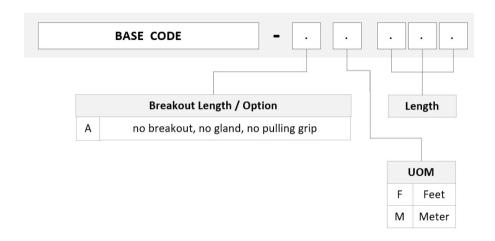

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5
Insertion Loss, maximum 0.35 dB

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted

Page 2 of 3

PPLUGV8LCUCR

UK-ROHS

Compliant/Exempted



Included Products

760248189 P-016-MP-5G-F08LM/20T Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, 16 fiber with 8 fiber subunits, Multimode OM5, Feet jacket marking, Aqua jacket color

