SFG23-12-3-126



G23 High Capacity Sector Frame, 12.5 ft face, includes three 126 in pipes; For patents, see www.cs-pat.com

OBSOLETE

This product was discontinued on: March 22, 2023

Replaced By:

SFG23HDX-12-3-120 G23HDX High Capacity Sector Frame,12.5 ft x 2.88 in OD face pipes, includes three 2.88 OD x 120 in

antenna pipes

Product Classification

Product Type High capacity Tower sector frame

General Specifications

Application 4G LTE antenna/radio mount

Mounting Angle 60°, 203.2 mm (8 in) | Straight or tapered legs up to 203.2 mm (8 in) OD

Patent Number Patent pending

Pipe, quantity 3

Tower Taper Non-tapered | Tapered


Dimensions

3,200.4 mm | 126 in Height **Face Width** 3.81 m | 12.5 ft Width 3,810 mm | 150 in Pipe Length 3,200.4 mm | 126 in 60.325 mm | 2.375 in **Face Support Pipe Diameter** 218.44 mm | 8.6 in Mounting Diameter, maximum **Mounting Diameter, minimum** 38.1 mm | 1.5 in **Pipe Outer Diameter** 60.325 mm | 2.375 in Stand-off Distance 1,226.82 mm | 48.3 in



SFG23-12-3-126

Outline Drawing

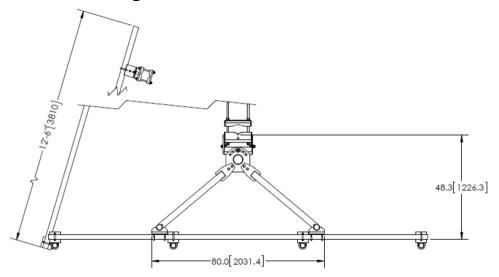

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating For Specifications, please contact your local ANDREW representative

Wind Rating Test Method TIA/EIA-222-G

Packaging and Weights

Included Frame | Pipe mounts | Plain end pipes (3) | Stiff arm | Tower attachment

Packaging quantity 1

Weight, net 371.946 kg | 820 lb

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code

