1.8m | 6ft ValuLine® High Performance, High XPD Antenna, dual-polarized, 4.400 – 5.000 GHz, gray, PDR48 flange

#### **OBSOLETE**

This product was discontinued on: May 1, 2022

Replaced By:

HX6-4-4WH 1.8m | 6ft ValuLine® High Performance, High XPD Antenna, dual-polarized, white, 4.400 – 5.000 GHz,

PDR48 flange

#### Product Classification

Product Type Microwave antenna

Product Brand ValuLine®

General Specifications

Antenna Type HX - ValuLine® High Performance, High XPD

Antenna, dual-polarized

1

PolarizationDualAntenna InputPDR48Antenna ColorGray

**Reflector Construction**One-piece reflector

Radome ColorGrayRadome MaterialFabricSide Struts, Included1

Dimensions

Side Struts, Optional

**Diameter, nominal** 1.8 m | 6 ft

**Electrical Specifications** 


**Operating Frequency Band** 4.400 - 5.000 GHz

Gain, Low Band35.7 dBiGain, Mid Band36.3 dBiGain, Top Band36.8 dBi

**COMMSCOPE®** 

**Boresite Cross Polarization Discrimination (XPD)** 33 dB 63 dB Front-to-Back Ratio 2.6° Beamwidth, Horizontal Beamwidth, Vertical 2.6° 23 dB **Return Loss VSWR** 1.15 Radiation Pattern Envelope Reference (RPE) 7386 **Electrical Compliance** ETSI 302 217 Class 3 **Cross Polarization Discrimination (XPD) Electrical Compliance** ETSI EN 302217 XPD Category 2 Mechanical Specifications **Compatible Mounting Pipe Diameter** 115 mm-120 mm | 4.5 in-4.7 in Fine Azimuth Adjustment Range ±15° ±5° **Fine Elevation Adjustment Range** Wind Speed, operational 180 km/h | 111.847 mph Wind Speed, survival 200 km/h | 124.274 mph

### Antenna Dimensions and Mounting Information

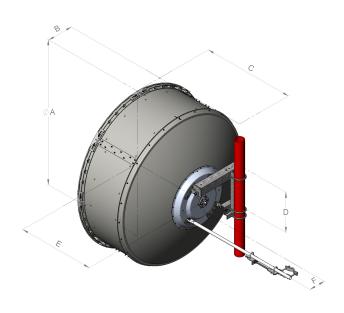

Dimensions in inches (mm)						
Antenna size, ft (m)	Α	В	С	D	Е	F
6 (1.8)	74.8 (1899)	13.4 (340)	47.5 (1206)	20.9 (530)	39.4 (1001)	8.4 (214)

#### Wind Forces at Wind Velocity Survival Rating

**Axial Force (FA)** 6960 N | 1,564.671 lbf

Angle  $\alpha$  for MT Max  $-130^{\circ}$ 

**Side Force (FS)** 1566 N | 352.051 lbf

**Twisting Moment (MT)** 3923 N-m | 34,721.477 in lb

Force on Inboard Strut Side 4075 N | 916.097 lbf

**Zcg without Ice** 363 mm | 14.291 in


 Zcg with 1/2 in (12 mm) Radial Ice
 541 mm | 21.299 in

 Weight with 1/2 in (12 mm) Radial Ice
 237 kg | 522.495 lb

Page 3 of 7



### Wind Forces at Wind Velocity Survival Rating Image

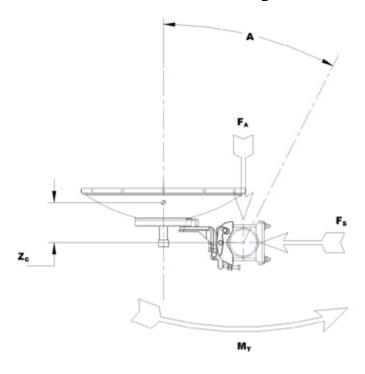

#### Packaging and Weights

Height, packed2110 mm | 83.071 inWidth, packed450 mm | 17.717 inLength, packed1900 mm | 74.803 inPackaging TypeStandard pack

 Volume
 1.8 m³ | 63.566 ft³

 Weight, gross
 126 kg | 277.782 lb

 Weight, net
 75 kg | 165.346 lb

## Regulatory Compliance/Certifications

#### Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



\* Footnotes

**Operating Frequency Band** 

Bands correspond with CCIR recommendations or common

Page 5 of 7

Front-to-Back Ratio

allocations used throughout the world. Other ranges can be

accommodated on special order.

Gain, Mid Band

For a given frequency band, gain is primarily a function of

antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the

measured antenna patterns.

**Boresite Cross Polarization Discrimination (XPD)**The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle

twice the 3 dB beamwidth of the co-polarized main beam.

Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

**Return Loss**The figure that indicates the proportion of radio waves

incident upon the antenna that are rejected as a ratio of

those that are accepted.

**VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-

Ratio within the operating band.

Radiation Pattern Envelope Reference (RPE)

Radiation patterns define an antenna's ability to discriminate

against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular

accuracy of +/-1° throughout

Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Wind Speed, operational For VHLP(X), SHP(X), HX and USX antennas, the wind speed

where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined

as a deflection is equal to or less than 0.1 degrees.

Wind Speed, survival

The maximum wind speed the antenna, including mounts

and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified

amount of radial ice.

Axial Force (FA) Maximum forces exerted on a supporting structure as a

result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the

mounting pipe.

Side Force (FS)

Maximum side force exerted on the mounting pipe as a

Page 6 of 7

**Twisting Moment (MT)** 

**Packaging Type** 

result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wirebound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.