#### **Base Product**



1.8 m | 6 ft ValuLine® High Performance Low Profile Antenna, dualpolarized, 7.125–8.500 GHz

#### Product Classification

Product Type	Microwave antenna
Product Brand	ValuLine®
General Specifications	
Antenna Type	VHLPX - ValuLine® High Performance Low Profile Antenna, dual- polarized
Polarization	Dual
Side Struts, Included	1
Side Struts, Optional	1 inboard
Dimensions	
Diameter, nominal	1.8 m   6 ft
Electrical Specifications	
Operating Frequency Band	7.125 – 8.500 GHz
Gain, Low Band	40.1 dBi
Gain, Mid Band	40.8 dBi
Gain, Top Band	41.5 dBi
Boresite Cross Polarization Discrimination (XPD)	32 dB
Front-to-Back Ratio	67 dB
Beamwidth, Horizontal	1.3 °
Beamwidth, Vertical	1.3 °
Return Loss	17.7 dB
VSWR	1.3
Radiation Pattern Envelope Reference (RPE)	7082D
Electrical Compliance	Brazil Anatel Class 3   Canada SRSP 306.4 Part B   Canada SRSP 307.1   ETSI 302 217 Class 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 1, 2023



### Mechanical Specifications


Compatible Mounting Pipe Diameter	<b>ng Pipe Diameter</b> 115 mm-120 mm   4.5 in-4.7 in	
Fine Azimuth Adjustment Range	±15°	
Fine Elevation Adjustment Range	±5°	
Wind Speed, operational	201 km/h   124.896 mph	
Wind Speed, survival	250 km/h   155.343 mph	

Page 2 of 5

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 1, 2023



Antenna Dimensions and Mounting Information

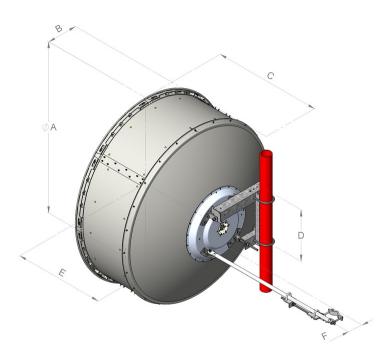

	Dimensio	ons in inch	nes (mm)			
Antenna size, ft (m)	A	В	с	D	Е	F
6 (1.8)	74.8 (1899)	13.4 (340)	47.5 (1206)	22.4 (570)	39.4 (1001)	6.9 (174)

### Wind Forces at Wind Velocity Survival Rating


Axial Force (FA)	10670 N   2,398.712 lbf
Angle α for MT Max	-120 °
Side Force (FS)	5286 N   1,188.34 lbf
Twisting Moment (MT)	4752 N-m   42,058.742 in lb
Zcg without Ice	363 mm   14.291 in
Zcg with 1/2 in (12 mm) Radial Ice	543 mm   21.378 in
Weight with 1/2 in (12 mm) Radial Ice	234 kg   515.881 lb

Page 3 of 5

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 1, 2023



Wind Forces at Wind Velocity Survival Rating Image

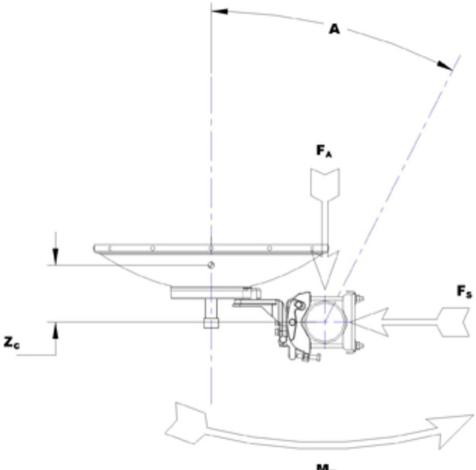

M<sub>T</sub>

### Packaging and Weights

Weight, net

Agency

86 kg | 189.597 lb

### Regulatory Compliance/Certifications

#### Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

### \* Footnotes

**Operating Frequency Band** 

Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.

Page 4 of 5

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 1, 2023



Gain, Mid Band	For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.
Boresite Cross Polarization Discrimination (XPD)	The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.
Front-to-Back Ratio	Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.
Return Loss	The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.
VSWR	Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band.
Radiation Pattern Envelope Reference (RPE)	Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout
Wind Speed, operational	For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees.
Wind Speed, survival	The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.
Axial Force (FA)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Side Force (FS)	Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Page 5 of 5

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: September 1, 2023

COMMSCOPE®